

FEATURES

- Non-invasive ultrasonic technology
- Bottom-up liquid level measurements
- High accuracy and reliability
- Analog output voltage proportional to liquid level
- Optional separate logic output to report custom specific liquid level set points



SPECIFICATIONS

Maximum ratings

Supply voltage (V_S) min. 6 V_{DC} , max. 24 V_{DC}

Supply current max. 50 mA

Temperature limits
 Operating 5...60 °C
 Storage -20...85 °C

Humidity limits 0 - 95 %RH
 (non-condensing)


PERFORMANCE CHARACTERISTICS

Characteristics	Min.	Typ.	Max.	Units
Analog output low voltage	0.5			V
Analog output high voltage			5	
Logic low voltage			0.6	
Logic high voltage	$V_s - 0.7$			
Analog output current			10	mA
Output sink current (output low)			25	
Output source current (output high)			25	
Response time		250		ms

TANK/VESSEL REQUIREMENTS:

The material of the tank must be plastic and have a single wall construction. On the underside it shall have a location that is relatively flat and parallel to the surface of liquid. Any obstruction in the tank or vessel may effect the sensor output.

OUTLINE DRAWING

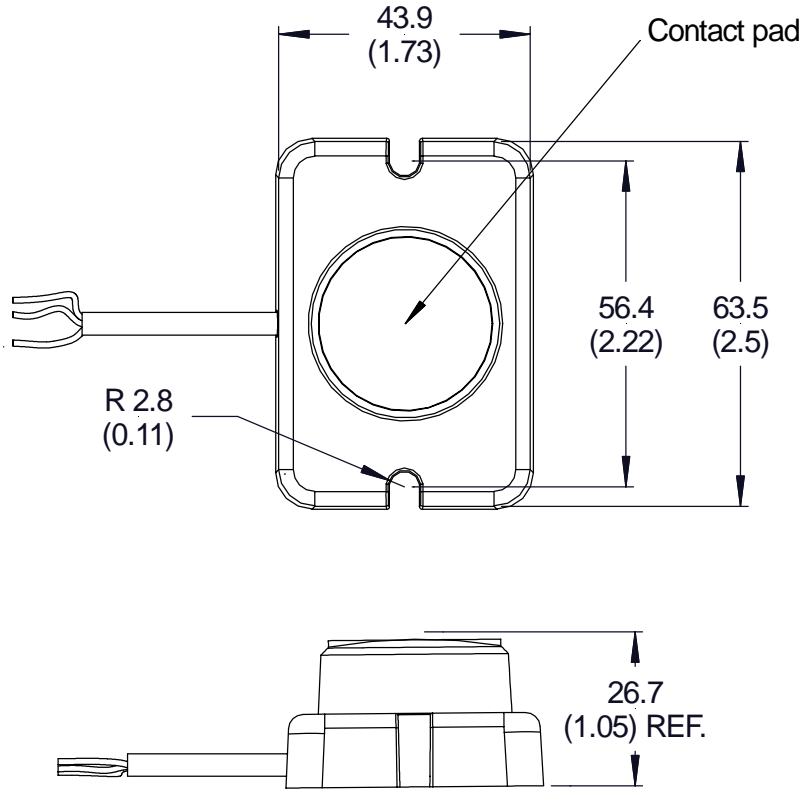

dimensions in mm (inch)

ELECTRICAL CONNECTION

Pin	Color	Connection
1	Red	Supply voltage
2	Black	Power and signal return
3	Orange	Analog output
4	Green	Logic output (optional)

Note: Custom specific options are widely available.
Please contact your nearest Sensorteknics sales office for further information.

Sensorteknics reserves the right to make changes to any products herein. Sensorteknics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.