

CTE / CTW8000...CS Series

OEM submersible pressure transducers



FEATURES

- 250 to 5000 mbar, 2.5 to 50 mH₂O gage¹ pressure
- For corrosive media
- 0...10 V or 4...20 mA output
- Field interchangeable
- EMC according to EN 61326-1¹¹

MEDIA COMPATIBILITY

Wetted materials:
 Stainless steel 1.4404 (316L), ceramic Al₂O₃,
 NBR (FKM), POM, PUR (PE/FEP), Loctite 603

Protection class:
 IP 68 (according to DIN EN 60529, NEMA 6P)¹



SPECIFICATIONS^{8,9}

Maximum ratings


Supply voltage (reverse polarity protection)	
CT...0...	13...32 V
CT...4... ²	9...32 V
Load current	
CT...0...	1 mA
Proof pressure ³	2 x rated pressure

Environmental


Temperature limits	
Storage	-25...70 °C
Operating	-10...70 °C
Compensated	0...70 °C
Vibration (5 to 500 Hz)	10 g _{RMS}
Mechanical shock	50 g

ELECTRICAL CONNECTION

Voltage output device

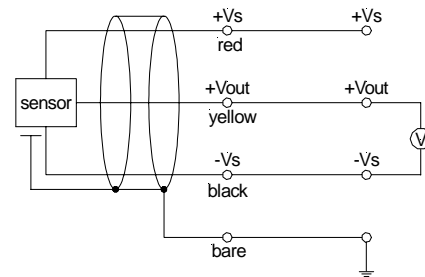

Current output device

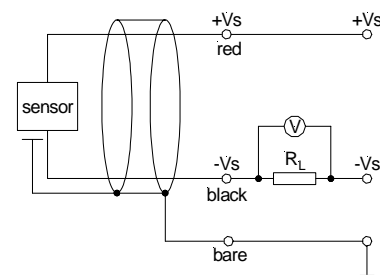

CTE / CTW8000...CS Series

OEM submersible pressure transducers

COMMON PERFORMANCE CHARACTERISTICS

($V_s=15\text{ V} \pm 0.1\text{ V}$, $T_A=25\text{ °C}$, RH=50 %)

Characteristics		Min.	Typ.	Max.	Unit
Thermal effects (0...70°C) ⁴	Offset	devices up to 1 bar/10 m H ₂ O	±0.03	±0.06	%FSO/°C
		all others	±0.02	±0.04	
	Span	±0.02	±0.04		
Thermal effects (-10...0 °C) ⁴	Offset		±0.03		
	Span		±0.03		
Non-linearity (BSL) ⁵ , hysteresis and repeatability			±0.1	±0.3	
Long term stability ⁶			±0.1	±0.3	
Output noise (0 < f < 1 kHz)			±0.1		
Response time (10 to 90 %)			35		ms
D/A resolution				11	bit
Power supply rejection	Offset		±0.01		%FSO/V
	Span		±0.02		

INDIVIDUAL PERFORMANCE CHARACTERISTICS

($V_s=15\text{ V} \pm 0.1\text{ V}$, $T_A=25\text{ °C}$, RH=50 %)

0...10 V output ($R_L > 100\text{ k}\Omega$)

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset		0	0.1	V
Full scale span ⁷	9.9	10	10.1	
Output impedance			25	Ω
Current consumption (no load)		4		mA


4...20 mA output ($R_L=100\ \Omega$)

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset	3.9	4.0	4.1	mA
Full scale span ⁷	15.9	16.0	16.1	
Power consumption ($I_L = 20\text{ mA}$)		250		mW

CTE / CTW8000...CS Series

OEM submersible pressure transducers


OUTLINE DRAWING¹

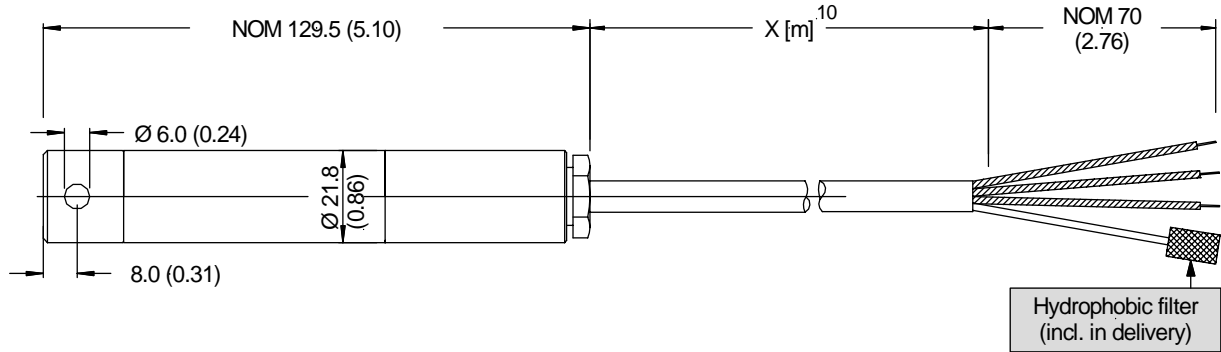

mass: typ. 210 g (without cable)

dimensions in mm (inches)

LOAD LIMITATION (4...20 mA output version)

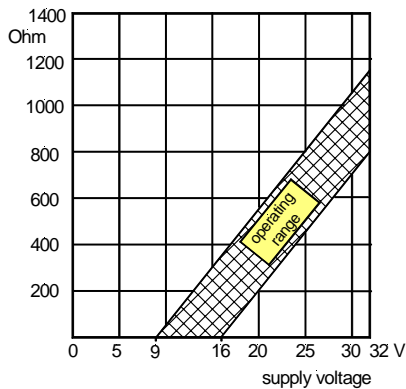

ELECTRICAL CONNECTION (cont.)

WIRE CONNECTION		
Colour	0...10 V	4...20 mA
red	+Vs	+Vs
black	-Vs	-Vs
yellow	Vout	-
bare	case / shield	case / shield
transparent	vent tube ¹	vent tube ¹

RECOMMENDED ACCESSORY (not included in delivery)

ZA000850: Cable hanger

ZA004151: Desiccant filter box

Specification notes:

1. The package is an all-sealed housing. For proper function the gage port is vented to the atmosphere through the connecting cable. Thus the vent tube of the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects are relative to 25 °C. Signal is clamped at 0 V.
5. Non-linearity refers to **Best Straight Line** fit. Hysteresis is the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure.
6. Long term stability is the change in output after one year.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. CE-labelling is in accordance with 2004/108/EC.
9. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.
10. Cable length for 0...10 V versions is max. 10 m.
11. Surge immunity according to EN 61000-4-5 for current output devices with cable lengths longer than 10 m. For shorter cable lengths please contact First Sensor.

CTE / CTW8000...CS Series

OEM submersible pressure transducers

ORDERING INFORMATION

Series/Pressure range		Pressure mode		Output signal		Cable length ¹⁰		Cable material		Sealing material			
CTEM8250	0...250 mbar	G	Gage	0	0...10 V	C5S	5 m	E	PE	V	Viton (FKM)		
CTEM8500	0...500 mbar			4	4...20 mA	C10S	10 m	U	PUR	N	NBR		
CTEM81K0	0...1000 mbar					Note: Other cable lengths on request.		F	FEP	Note: Older part no. do not contain this digit. Without this digit NBR will be used.			
CTEM81K6	0...1600 mbar												
CTEM82K0	0...2000 mbar												
CTEM85K0	0...5000 mbar												
CTW82x5	0...2.5 mH ₂ O												
CTW8005	0...5 mH ₂ O												
CTW8010	0...10 mH ₂ O												
CTW8016	0...16 mH ₂ O												
CTW8020	0...20 mH ₂ O												
CTW8050	0...50 mH ₂ O												
Example: CTEM81K0G4C5SUN													
Devices highlighted in grey are preferred items.						For all other devices MOQ may apply.							

Custom pressure ranges and other fittings are available on request. MOQ applies. Contact First Sensor.

First Sensor reserves the right to make changes to any products herein. First Sensor does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.