

Ultra Low Carryover Valve

Miniature Liquid Valve



ENGINEERING YOUR SUCCESS.



THIS IS INCREASING THROUGHPUT

Ultra Low Carryover Valve

Improve Throughput
Decrease Fluidic Circuit Volume
Reduce Waste

Parker Hannifin's Precision Fluidics Division is excited to introduce the Ultra Low Carryover Valve, a novel new liquid valve that features both unparalleled carryover performance and the ability to reduce fluidic circuit complexity by replacing one or more valves with a single Ultra Low Carryover Valve.

Truly two valves in one.




discover.parker.com/ultralowcarryovervalve

ENGINEERING YOUR SUCCESS.

Ultra Low Carryover Miniature Liquid Valve

Typical Flow Curve

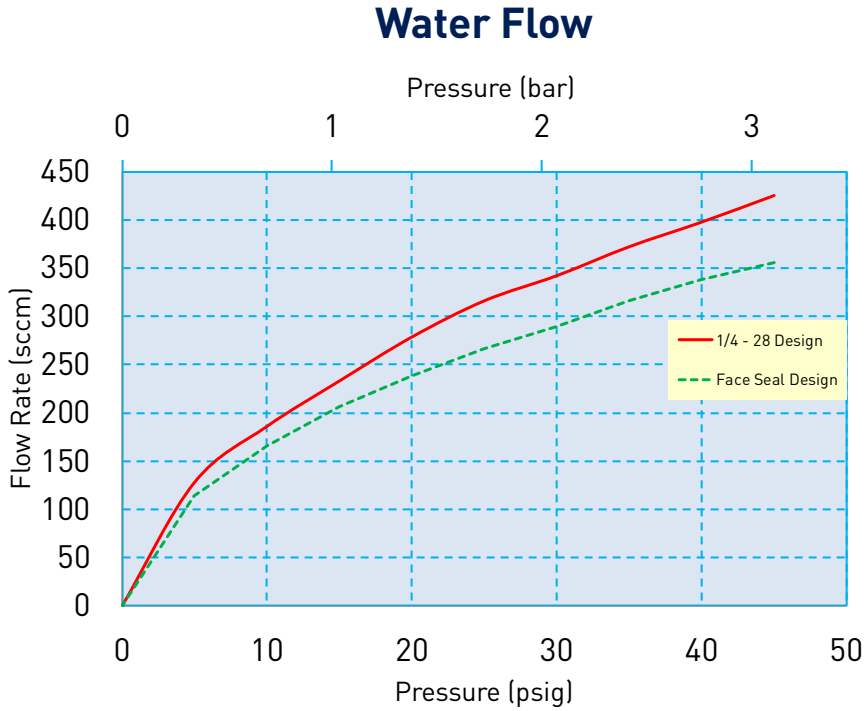

Electrical Interface



Wire Leads
 4.5 in (114.3 mm) ±0.25 in (6.35 mm)
 Terminated with Molex Housing #50-57-9402

Liquid Interface



1/4 - 28 Design
 (Threaded Connectors)




Face Seal Design
 (Manifold Mount)

Ultra Low Carryover Miniature Liquid Valve

Mechanical Integration

Dimensions

1/4 - 28 Design

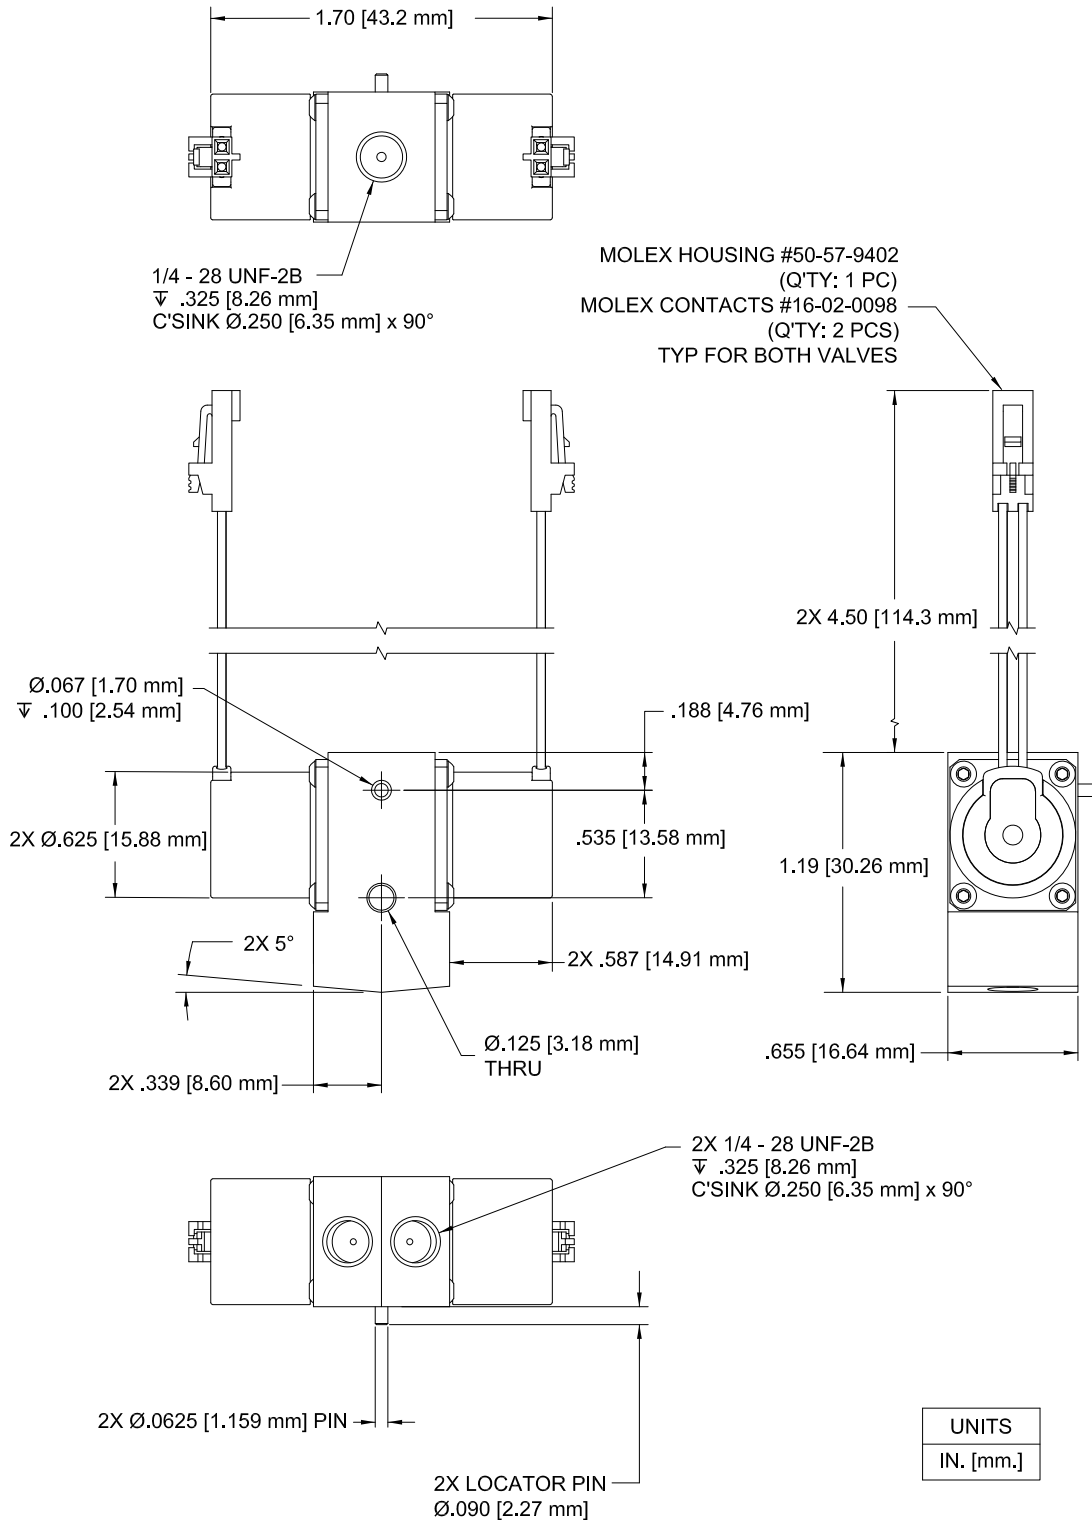


Ultra Low Carryover Miniature Liquid Valve




Mechanical Integration

Dimensions

Face Seal Design

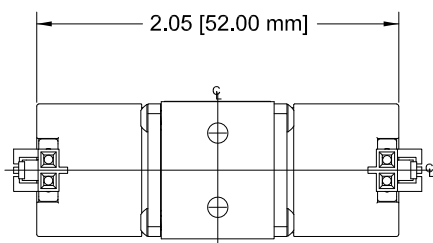

MOLEX HOUSING #50-57-9402
 (Q'TY: 1 PC)
 MOLEX CONTACTS #16-02-0098
 (Q'TY: 2 PCS)
 TYP FOR BOTH VALVES

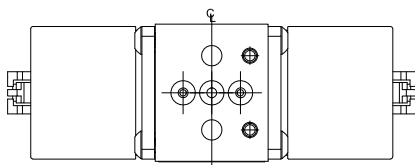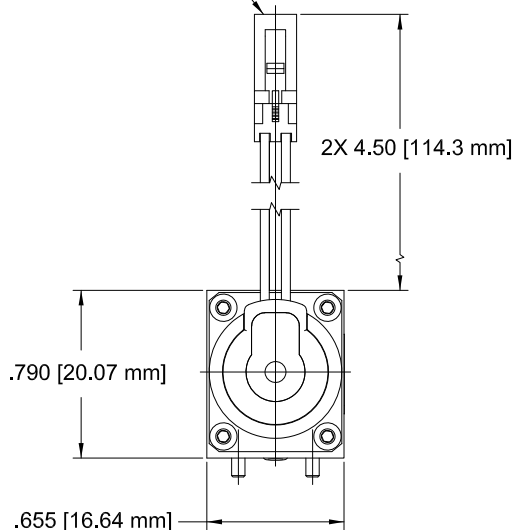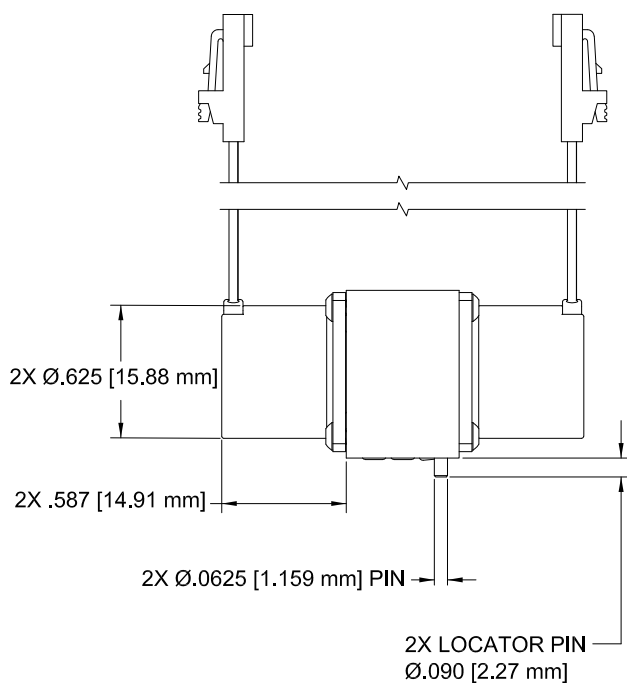


UNITS
IN. [mm.]

Ultra Low Carryover Miniature Liquid Valve

Installation and Use

Manifold Interface

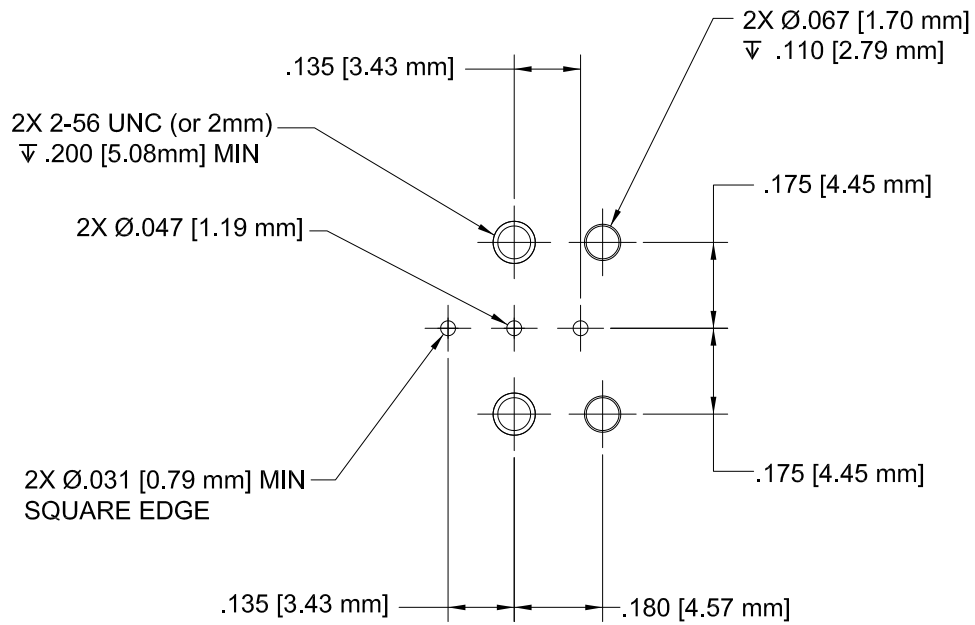

UNITS
IN. [mm.]


Ultra Low Carryover Miniature Liquid Valve

Hit and Hold Specifications

Hit and Hold is a method for driving valves that can be used to reduce power consumption and heat generation while maintaining valve performance specifications. The valve is “hit” with the full rated voltage for some time period to open it (T1 in the graph) and then “held” open with substantially reduced voltage until the desired pulse length is reached (T2 in the graph). The following table shows the possible holding voltages and power consumption for our standard 12 and 24 VDC solenoids. A hit and hold circuit is required for use with actuation exceeding 100ms.

Rated Voltage (VDC)	Hold Voltage (VDC)	Hold Power
24	12	1.8 watts
12	6	1.5 watts

Note: Other voltages available

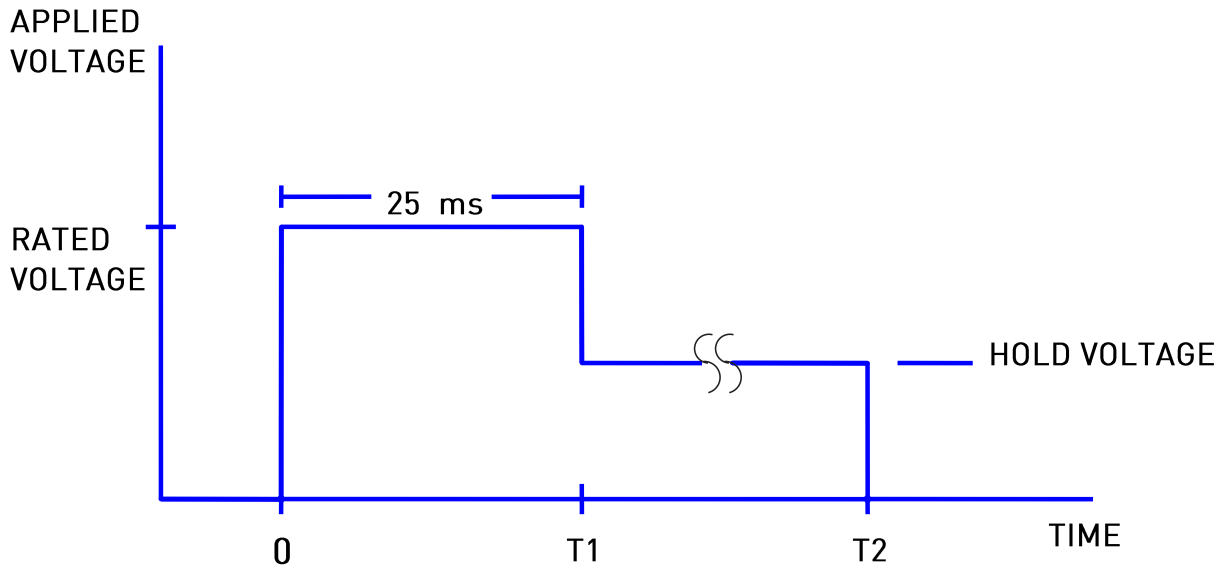

Hold Voltage Graph

Ultra Low Carryover Miniature Liquid Valve

Chemical Compatibility Chart

Chemical	Diaphragm			Other Wetted Materials
	FFKM	or	EPDM	PEEK
DI Water	1		1	1
Methanol	1		1	1
Isopropanol	1		1	1
Ethanol	1		1	1
Acetonitrile	1		1	1
Tetrahydrofuran	2		4	1
Toluene	1		4	1
MEK	1		1	1
Organic Acids - Dilute	1		1	1
Non Organic Acids - Dilute	1		1	1
Bases - Dilute	1		1	1
Saline	1		1	1
Bleach 12%	2		1	1
Sodium Hydroxide 20%	1		1	1

Compatibility Legend

1. EXCELLENT
Minimal or no effect
2. GOOD
Possible swelling and or loss of physical properties
3. DOUBTFUL
Moderate or severe swelling and loss of physical properties
4. NOT RECOMMENDED
Severe effect and should not be considered

*The above is an Abbreviated Chemical Compatibility Chart. Please consult factory for additional information.

Regulatory CE
ENG61010 - 1:2010

IP-54 Rating - Contact Factory For Details

RoHS Directive Compliant - Contact Factory For Details 

REACH Compliant - Contact Factory For Details 

Ultra Low Carryover Miniature Liquid Valve

Ordering Information



1/4 - 28 Design



Face Seal Design



Face Seal Manifold

ULC-	3	24	FF	3	F	F	-000
Series	Configuration	Voltage	Seal Material	Orifice	Mounting	Electrical Connection	Config
ULC-	3: 3 - Port / 4 - Mode	12: 12 VDC 24: 24VDC	FF: FFKM EP: EPDM	3: 0.030" (0.76mm)	F: Face Seal 4: 1/4 - 28	F: Flying leads	- 000

Accessories		
Part Number	Description	Comments
890-001198-001	1/4 - 28 Female Threaded Face Seal Manifold, 3 - Port	Allows connection of 1/4 - 28 fittings to Face Seal Design
191-000272-001	18-8 Stainless Steel Mounting Screws, #2-56 x 1"	

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media and Media Temperature Range
- Ambient Temperature Range

For more detailed information, visit us on the Web, or call 603-595-1500.

Ultra Low Carryover Miniature Liquid Valve


Serving a broad spectrum of life science, air quality, and process instrumentation OEM fluidic needs



Providing Pressure and Vacuum:
Broad range of diaphragm pumps for Gas and Liquid



Gas Flow Control:
High to Low Flow Proportional Valves



On/Off & Channel Selection Capabilities:
Gas and Liquid Solenoid Valves



High Precision Thermal Flow Control:
Mass Flow Controllers and Meters

Learn More at: discover.parker.com/ultralowcarryovervalve

Below are some common specifications that are helpful to have on hand to accelerate your product selection:

- Gas Type
- Maximum Flow Rate
- Inlet and Outlet Pressures
- Operating Temperature
- Standard Reference Conditions
- Process Connection Size and Type
- Set Point Signal
- Digital Communication Protocol Preferences

For more information call +1 603 595 1500 or email ppfinfo@parker.com

Visit www.parker.com/precisionfluidics

Recommendations on application design and material selection are based on available technical data and are offered as suggestions only. Each user should conduct their own tests to determine the suitability for their own use. Parker offers no express or implied warranties concerning the form, fit, or function of a product in any application.

